

09-29-00

17

IN THE UNITED STATES OF AMERICA
PATENT AND TRADEMARK OFFICE

APPLICANTS: Jeff B. Jordan
TITLE: Liquid Cooled Speaker
ATTY. DOCKET: 7721.105

jc625 U.S. PRO
09/670913
09/28/00

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of Jeff B. Jordan for Liquid Cooled Speaker.

This is an original application.

The inventorship for the claims in this application are the same.

Enclosed are eight (8) pages of specification, four (4) pages of claims, one (1) page of abstract, and six (6) sheets of informal drawings.

Additional papers enclosed include an Assignment, a Combined Declaration and Power of Attorney, a Verified Statement Claiming Small Entity Status (Independent Inventor), and a Verified Statement Claiming Small Entity Status (Business Concern).

				CLAIMS AS FILED		RATE	BASIC FEE
NO. FILED		NO. EXTRA					
							\$690.00
Total							
Claims	22	-20=	2	X	\$18.00		\$36.00
Independent							
Claims	3	-3=	0	X	\$78.00		\$0.00
Multiple dependent							
claims			0	X	\$260.00		\$0.00

Filing Fee Calculation \$ 726.00

A Verified Statements that this is a filing by a small entity under 37 CFR 1.9 and 1.27 are attached.

Filing Fee Calculation (50% of above) \$ 363.00

jc690 U.S. PRO
09/28/00

09/28/00

Enclosed are checks totaling \$363.00 for the basic filing fee. In case of over-payment please refund.

Reg. No.: 38,882

Tel. No. (225) 927-9908




LANCE A. FOSTER
P. O. Box 15928
Baton Rouge, Louisiana 70895

Certification Under 37 CFR 1.10

I hereby certify that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on this 28 day of September, 2000.

EXPRESS MAIL LABEL EL004764030US



IN THE UNITED STATES OF AMERICA PATENT AND TRADEMARK OFFICE

APPLICANTS: Jeff B. Jordan

TITLE: Liquid Cooled Speaker

ATTY. DOCKET: 7721.105

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS - SMALL BUSINESS CONCERN

I hereby declare that I am an official empowered to act on behalf of the small business concern identified below:

NAME OF CONCERN: Southern Audio Services, Inc.
ADDRESS OF CONCERN: 15049 Florida Boulevard
Baton Rouge, Louisiana 70809

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 37 CFR 121.3-18, and reproduced in 37 CFR 1.9 (d) for purposes of paying reduced fees under section 41 (a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern in the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled Liquid Cooled Speaker by inventor Jeff B. Jordan described in the specification filed herewith.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28 (b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Jon C. Jordan

TITLE OF PERSON OTHER THAN OWNER: President

ADDRESS OF PERSON SIGNING: 15049 Florida Boulevard, Baton Rouge, Louisiana 70809

SIGNATURE 


DATE

9/28/00

Certification Under 37 CFR 1.10

I hereby certify that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on this 28 day of September, 2000.

EXPRESS MAIL LABEL EL004764030US



IN THE UNITED STATES OF AMERICA
PATENT AND TRADEMARK OFFICE

APPLICANTS: Jeff B. Jordan
TITLE: Liquid Cooled Speaker
ATTY. NO.: 7721.105

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

VERIFIED STATEMENT (DECLARATION)
CLAIMING SMALL ENTITY STATUS (37 CFR 1.9 (f)
AND 1.27 (b)) - INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9 (f) for purposes of paying reduced fees under section 41 (a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled Liquid Cooled Speaker, described in the specification filed herewith.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9 (f) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9 (d) or a nonprofit organization under 37 CFR 1.9 (e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

FULL NAME Southern Audio Services, Inc.
ADDRESS 15049 Florida Boulevard
Baton Rouge, Louisiana 70809

☐ INDIVIDUAL ☒ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28 (b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Jeff B. Jordan
Jeff B. Jordan

09/28/2000
Date

Certification Under 37 CFR 1.10

I hereby certify that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on this 28 day of September, 2000.

EXPRESS MAIL LABEL EL004764030US

Lisa R. Phillips

LIQUID COOLED SPEAKER

Invented by:

Jeff B. Jordan

Attorney Docket No. 7721.105

BACKGROUND OF THE INVENTION

I. Field of the Invention

This invention relates to loudspeakers for music systems. More particularly, this invention relates to loudspeakers which may be water cooled to provide higher sound quality.

Conventional loudspeakers (speakers) used in modern music systems must be capable of producing high sound quality at many different power levels. Speakers typically include a permanent magnet for generating a magnetic field and a yoke assembly. The yoke assembly has a T-yoke, and a magnet / plate pieces for focusing the magnetic field to an air gap in which the field is particularly intensified. A voice coil is suspended in the air gap so as to be capable of vibrating. A current is passed through the voice coil and the interaction of the magnetic field induced by the current and the field from the permanent magnet causes the voice coil to vibrate. The voice coil is connected to a speaker cone which has a large surface area to vibrate air in the vicinity of the cone and thus produce sound.

One factor which adversely affects the life of the speaker is excessive heat generated in the voice coil. This heat is mainly caused by the inherent impedance of the wire in the voice coil. The voice coils in speakers have a typical operating temperature range of approximately 150° F to 200° F. When the voice coil begins to significantly exceed the range, for example approximately 300° F, the voice coil may be damaged. This damage could include the coil windings becoming de-laminated from the former or the adhesive between various other speaker parts breaking down. Such damage may cause outright speaker failure or at the very least, substantial shortening of the effective life of the speaker. Another problem caused by excessive heating is an increase in impedance in the voice coil which reduces the amount of power converted to sound. Of course, the increasing impedance is self-perpetuating in that a higher impedance results in more heat

which in turn creates still higher impedance. While attempts have been made in the prior art to induce some air flow cooling within the speaker, this mechanism is generally insufficient to provide the cooling needed to prevent damage to the voice coil.

What is needed in the art is a speaker which can be efficiently constructed and operated to accomplish water (or other liquid) cooling of a speaker.

II. Objects and Summary of Invention

It is therefore an object of this invention to provide an improved speaker which substantially reduces the amount of heat to which the voice coil is exposed.

It is a further object to provide a speaker which includes a liquid cooling mechanism.

It is a further object to provide a fluid cooled T-yoke which will cool a speaker of which the T-yoke is an element.

Therefore the present invention provides a fluid cooled speaker having a T-yoke with a pole piece, a magnet surrounding the pole piece, a voice coil positioned between the pole piece and the magnet, and a cone connected to the voice coil. The T-yoke includes a body having a base and a pole piece with a sealed cavity formed within the pole piece. The T-yoke also has a fluid inlet and outlet formed in the body and communicating between the cavity and an area outside the body of the T-yoke.

III. Brief Description of the Drawings

Figure 1A is a cross-sectional view of a typical prior art speaker having a non-vented T-yoke.

Figure 1B is a cross-sectional view of a typical prior art speaker having a vented T-yoke.

Figure 2 is an exploded view of a typical prior art speaker.

Figures 3A-3D represent one embodiment of the fluid cooled T-yoke and speaker of the

present invention.

Figures 4A-4C represent an alternate embodiment of the fluid cooled T-yoke and speaker of the present invention.

Figures 5A-5C represent another alternate embodiment of the fluid cooled T-yoke and speaker of the present invention.

Figures 6A-6C represent another alternate embodiment of the fluid cooled T-yoke and speaker of the present invention.

Figures 7A-7D illustrate still another embodiment of the fluid cooled T-yoke and speaker of the present invention.

Figure 8 represents the speaker of the present invention connected to a typical fluid cooling system.

IV. Detailed Description of the Invention.

Figure 1A illustrates a cross-sectional view of prior art speaker 1 while Figure 2 is an exploded view of speaker 1. Speaker 1 is formed from a basket 8 with a cone 4 positioned therein. Cone 4 terminates on the upper perimeter of basket 8 with an edge roll 3 and a top gasket 2 helping to secure cone 4 in basket 8. It can be seen how cone 4 is connected at its lower perimeter to voice coil former 10. Voice coil former 10 will include a cylindrical tubular member constructed of a material such as aluminum and will have voice coil formed by numerous turns of electrical wiring (normally copper or aluminum) wrapped around the former tube. As used herein, the term "voice coil" may be used to refer either to the former with the wire voice coil wrapped thereon or simply the coil of wiring itself. A dust cap 5 will be positioned on voice coil 10.

design may provide some cooling effect of T-yoke 15, the heat transfer rate between T-yoke 15 and air is significantly less than the heat transfer rate between a T-yoke and a circulating liquid.

Figures 3A-3D provide one preferred embodiment of the present invention, liquid cooled T-yoke 25. T-yoke 25 will generally comprise a pole piece 26 and a base 27. Figure 3B illustrates how an interior cavity 33 will be formed in pole piece 26. A threaded base aperture 28 communicating with cavity 33 which will be formed in base 27. Figure 3B also illustrates a base plug 30 having threaded surface 31 and barbed hose fittings 32 extending from fluid inlet 34 and fluid outlet 35. Base plug 30 also has an extension tube 36 extending above the height of threaded surface 31. While extension tube 36 is shown connected to inlet 34, it will be understood that extension tube 36 could just as readily be attached to outlet 35. Figure 1C best illustrates how base plug 30 will further include a polygonal gripping surface 38 adapted for application of a wrench or similar tool. Figure 1D illustrates how base plug 30 will be inserted into threaded base aperture 28 of T-yoke 25 and form a fluid tight seal between base aperture 28 and plug 30. When base plug 30 is inserted into T-yoke 25, extension tube 36 will be positioned in the upper portion 37 of cavity 33. In this manner, extension tube 36 helps insure that fluid will circulate through all portions of cavity 33 and effect the greatest heat transfer.

An alternate embodiment of the T-yoke is seen in Figures 4A-4C. T-yoke 40 differs from the previous embodiment in that the water circulating cavity is formed by way of two intersecting passages 42 being drill through base 47 into the interior of pole piece 46. Threaded fluid hose fittings 41 may then be inserted into passages 42 in order to form a fluid inlet and outlet through fittings 41. Again hose fittings 41 have barbs which aid in retaining the hose on fittings 41.

A still further embodiment is seen in Figures 5A-5C. Here, the fluid cavity is formed (as best seen in Figure 5C) by drilling two vertical passages 55 through base 57 and into pole piece

56. A horizontal connecting passage 52 is drilled through the upper portion of pole piece 56 such that vertical passages 55 will be connected. As suggested by Figure 5A, the threaded apertures 53 remaining after the formation of passage 52 will be closed by way of threaded plugs 54 being inserted therein. Passage 52 could be made with or without the use of threads and a seal may be formed at the apertures 53 whether threaded or unthreaded by applying a heat resistant sealing compound such as liquid steel or epoxy. Alternatively, plugs 54 could be pressed or sintered into apertures 53 to form the necessary seals. Figure 5B suggest how threaded fluid line fittings 51 will be inserted into the inlet and outlet apertures created at the bottom of vertical passages 55.

A still further embodiment is shown in Figures 6A-6C. In Figure 6A, pole piece 66 is formed with a removable pole cap 68. As in Figures 5A-5C, vertical passages 65 will be drilled through base 67 and into pole piece 66. A cross channel 62 (see Figure 6A) is then milled out of the top of the material separating the vertical passages 65. A gasket or O-ring 63 may be positioned around cross channel 62 and then pole cap 68 will be secured to pole piece 66 by way of screws 69. As before, threaded fluid line fittings 61 will be inserted into the inlet and outlet apertures created at the bottom of vertical passages 65.

Figures 7A-7D illustrate still another embodiment of the present invention. The embodiment in the Figures 7 differs somewhat from previous embodiments in that the prior art air vented T-yoke 15 is converted to water cooled operation. As suggested in Figure 7B, the vent aperture 19 will have threads 80 formed therein. These threads 80 will be engaged by a threaded sleeve cup insert 82. Cup insert 82 has a threaded outer surface 86 and a cavity 84 formed within cup insert 82. A threaded base opening 88 is also formed at the bottom of cup insert 82. A fluid line fitting plug 81 will have a threaded collar 87 which is sized to engage the threads on base opening 88, with O-ring 83 forming a water tight seal between these elements. While not shown

in the drawings, cup insert 82 could alternatively be formed without a threaded outer surface 86, but sized to create a tight friction fit within vent aperture 19. Cup insert 82 could then be pressed into place within vent aperture 19. Fitting plug 81 could also be formed without threaded collar 87. The base opening 88 on cup insert 82 could then be formed with an extended lip which would be rolled over the bottom of fitting plug 81 once fitting plug 81 was pressed into base opening 88.

Fitting plug 81 will include two hose fittings 89 which form fluid inlet 34 and outlet 35 and fitting plug 81 will further include a divider wall 85 (best seen in Figure 7D) positioned above and between inlet 34 and outlet 35. Figure 7D first illustrates fitting plug 81 with divider wall 85 seen from the side and further illustrates fitting plug 81 rotated 90° to show divider wall 85 from the front perspective. Figure 7C demonstrates how sleeve cup insert 82 will be threaded into aperture 19 and fitting plug 81 threaded into base opening 88. In this configuration, the T-yoke 15 becomes mechanically equivalent to the previously disclosed embodiments of the T-yoke which had cavities formed directly in the pole piece. As shown by Figure 7C, cooling fluid will enter cavity 84 through inlet 34, circulate around divider wall 85 and exit outlet 35. As seen in Figure 7D, divider wall 85 has a width "w" which will be approximately the width of cavity 84. It is not necessary that divider wall 85 form a seal with the sides of cavity 84. It is only necessary that divider wall 85 is wide enough to direct a substantial portion of the cooling fluid entering cavity 85 over the top of divider wall 85 as opposed to around its sides. It will be understood that divider wall 85 performs the same function as extension tube 36 (seen in Figure 3B) in that it forces fluid circulation in the upper portion of the cavity 85. Preferably, cup insert 87 will be constructed of a highly conductive material, such as metal (aluminum, iron, etc.), so that cup insert 87 will readily conduct heat from T-yoke 15 and allow transfer of the heat to fluid circulating through cavity 84.

Figure 8 illustrates one embodiment of the fluid cooling system which will circulate cooling fluid to the fluid cooled speaker of the present invention. Speaker 1 is illustrated with the T-yoke 25 of the present invention. Heat from voice coil 10 will be transferred to T-yoke 25 and then to the fluid in cavity 33. The fluid in cavity 33 is circulated from outlet 35 to heat exchanger 76 by pump 75. As the fluid flows through heat exchanger 76, heat will be dissipated to the surrounding environment by vanes 77 on heat exchanger 76. The cooled fluid will then be circulated back to cavity 33 by way of inlet 34. It will be understood that Figure 8 is illustrative of only one basic fluid cooling system. The system could also include a separate fluid reservoir integrated therein. Additionally, various types of conventional heat exchange mechanisms could be employed, including eliminating the heat exchanger 76 and allowing the heat transfer to occur in a fluid reservoir. There are also a large variety of fluids which could be used to cool the present invention. These fluids include water, glycol, a water/glycol mixture and numerous oils.

Although certain preferred embodiments have been described above, it will be appreciated by those skilled in the art to which the present invention pertains that modifications, changes, and improvements may be made without departing from the spirit of the invention defined by the claims. All such modifications, changes, and improvements are intended to come within the scope of the present invention.

CLAIMS

I claim:

1. A fluid cooled T-yoke for a loudspeaker, said T-yoke comprising:
 - a. a body having a base and a pole piece with a sealed cavity formed within said pole piece;
 - b. a fluid inlet formed in said body and communicating between said cavity and an area outside said body; and
 - c. a fluid outlet formed in said body and communicating between said cavity and an area outside said body.
2. The fluid cooled T-yoke according to claim 1, wherein said base has an aperture formed therein which communicates with said cavity and a base plug sealingly engages said aperture.
3. The fluid cooled T-yoke according to claim 2, wherein said fluid inlet and fluid outlet are formed through said base plug.
4. The fluid cooled T-yoke according to claim 3, wherein said cavity has an upper portion and one of said fluid inlet or outlet includes an extension tube extending into said upper portion of said cavity to insure fluid circulates through said upper portion.
5. The fluid cooled T-yoke according to claim 1, wherein a central wall divides said cavity into two cells and a top passage within said cavity connects said two cells.
6. The fluid cooled T-yoke according to claim 5, wherein said fluid inlet connects with one of said two cells and said fluid outlet connects with the other of said two cells.
7. The fluid cooled T-yoke according to claim 5, wherein said pole piece has sidewalls and said top passage is formed through said sidewalls thereby creating apertures and said apertures have plugs positioned therein.

8. A fluid cooled loudspeaker having a T-yoke with a pole piece, a magnet surrounding said pole piece, a voice coil positioned between said pole piece and said magnet, and a cone connected to said voice coil, said T-yoke comprising:

- a. a body having a base and a pole piece with a sealed cavity formed within said pole piece;
- b. a fluid inlet formed in said body and communicating between said cavity and an area outside said body; and
- c. a fluid outlet formed in said body and communicating between said cavity and an area outside said body.

9. The fluid cooled loudspeaker according to claim 8, wherein said base has an aperture formed therein which communicates with said cavity and a base plug sealingly engages said aperture.

10. The fluid cooled loudspeaker according to claim 9, wherein said fluid inlet and fluid outlet are formed through said base plug.

11. The fluid cooled loudspeaker according to claim 10, wherein said cavity has an upper portion and one of said fluid inlet of fluid outlet includes an extension tube extending into said upper portion of said cavity to insure fluid circulates through said upper portion.

12. The fluid cooled loudspeaker according to claim 8, wherein:

- a. said cone is positioned in a speaker basket with a field plate positioned between said magnet and said speaker basket;
- b. a damper is connected at an outer perimeter to said basket and at an inner perimeter to said voice coil; and
- c. at least one electrical lead passing into said basket and connecting to said voice

coil.

13. The fluid cooled speaker according to claim 8, wherein said fluid inlet and said fluid outlet communicate with a coolant fluid reservoir.

14. The fluid cooled speaker according to claim 13, wherein a pump circulates coolant fluid between said T-yoke and said fluid reservoir.

15. A fluid cooled loudspeaker system comprising:

a. a T-yoke with a pole piece, a magnet surrounding said pole piece, a voice coil positioned between said pole piece and said magnet, and a cone connected to said voice coil;

b. said T-yoke having: i) a body having a base and a pole piece with a sealed cavity formed within said pole piece, ii) a fluid inlet formed in said body and communicating between said cavity and an area outside said body, and iii) a fluid outlet formed in said body and communicating between said cavity and an area outside said body; and

c. a coolant fluid reservoir communicating with said fluid inlet and said fluid outlet.

16. The fluid cooled speaker system according to claim 15, wherein a pump circulates coolant fluid between said T-yoke and said fluid reservoir.

17. The fluid cooled speaker according to claim 8, wherein said inlet and outlet have hose connectors extending therefrom.

18. The fluid cooled speaker system according to claim 15, wherein said system further includes a heat exchanger.

19. The fluid cooled speaker system according to claim 15, wherein said reservoir performs the function of a heat exchanger.

20. The fluid cooled speaker system according to claim 15, including a coolant fluid taken from the group comprising water, glycol, water-glycol mixture, or oil.

21. The fluid cooled loudspeaker according to claim 8, wherein said pole piece and said base include a threaded aperture such that a threaded sleeve cup insert engages said aperture in order to form said sealed cavity within said body.

22. The fluid cooled loudspeaker according to claim 21, wherein a fluid line fitting plug engages a bottom section of said sleeve cup insert and said fluid line fitting plug has a dividing wall extending upwards therefrom.

ABSTRACT

A fluid cooled speaker having a T-yoke with a pole piece, a magnet surrounding the pole piece, a voice coil positioned between the pole piece and the magnet, and a cone connected to the voice coil. The T-yoke includes a body having a base and a pole piece with a sealed cavity formed within the pole piece. The T-yoke also has a fluid inlet and outlet formed in the body and communicating between the cavity and an area outside the body of the T-yoke.



FIG. 1A
PRIOR ART



FIG. 2
PRIOR ART















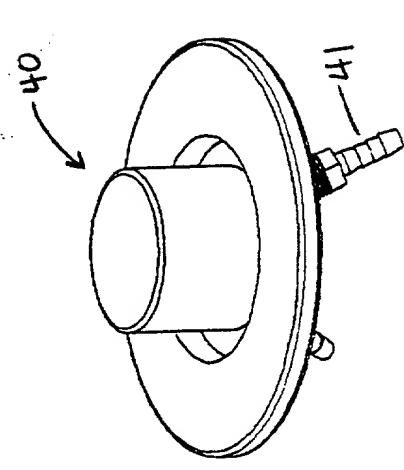


FIG. 4A

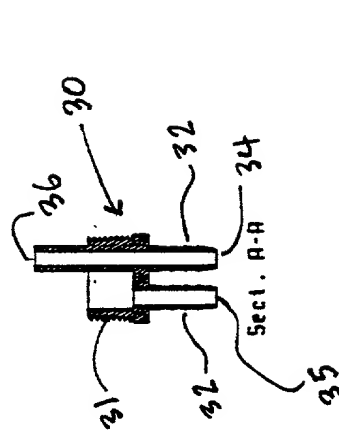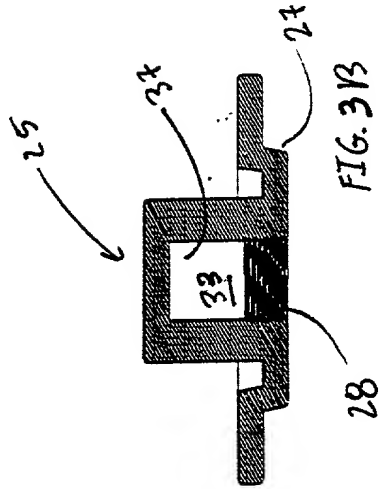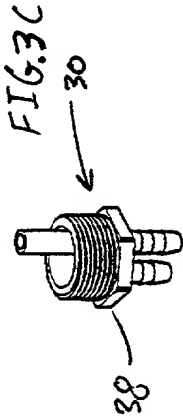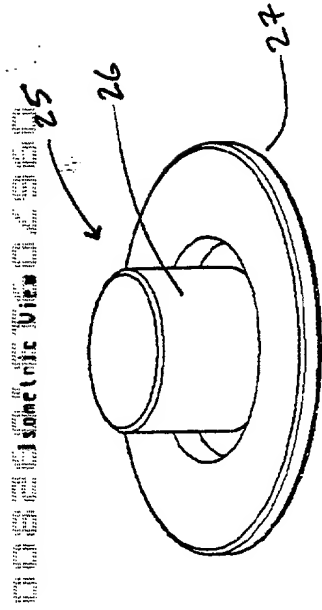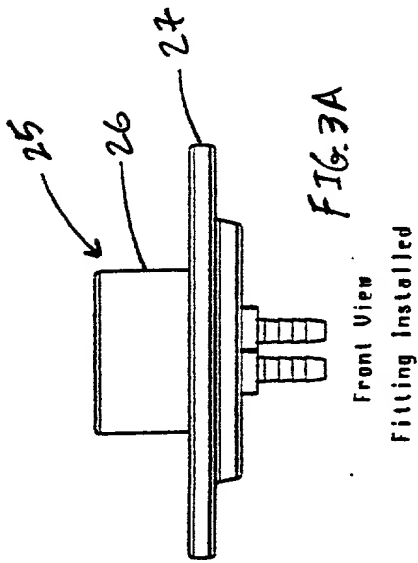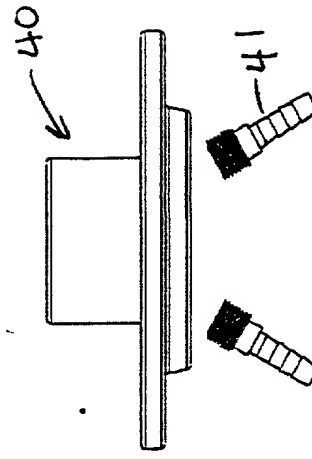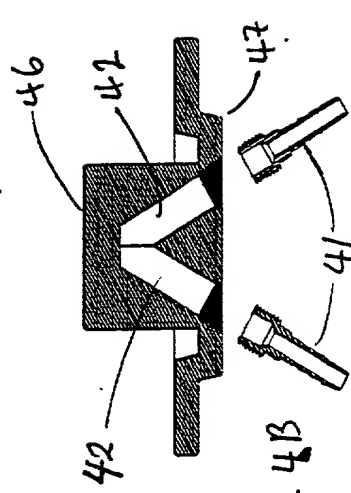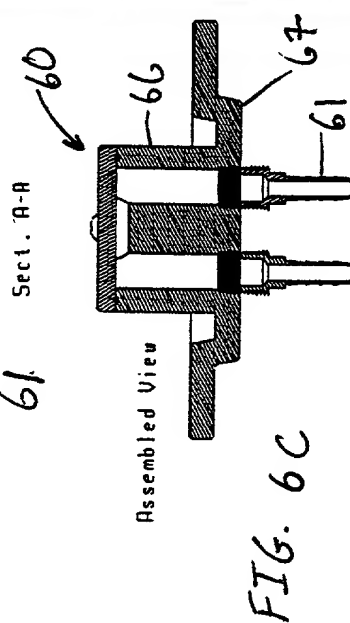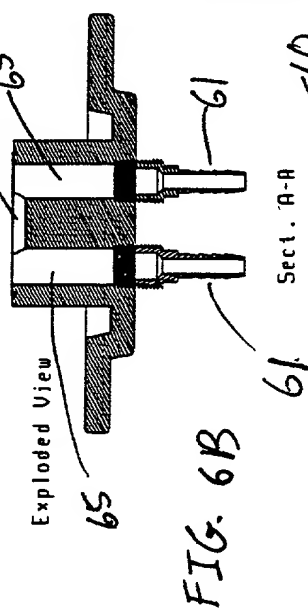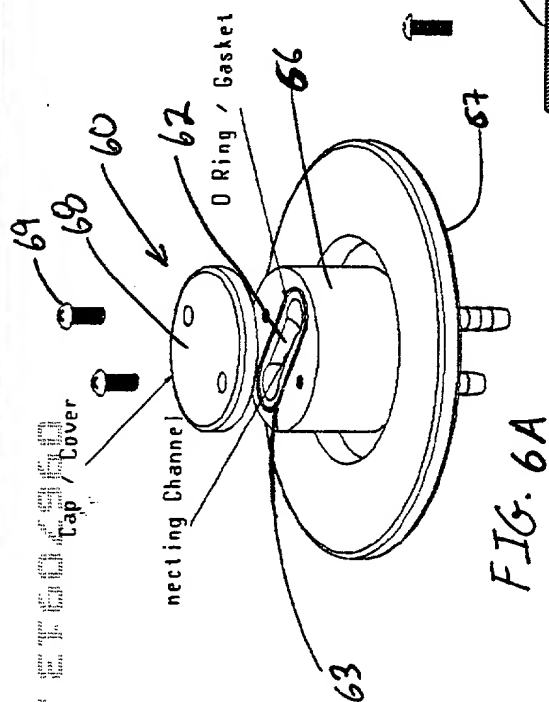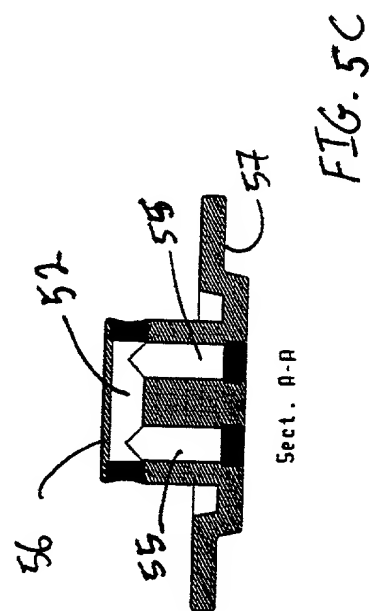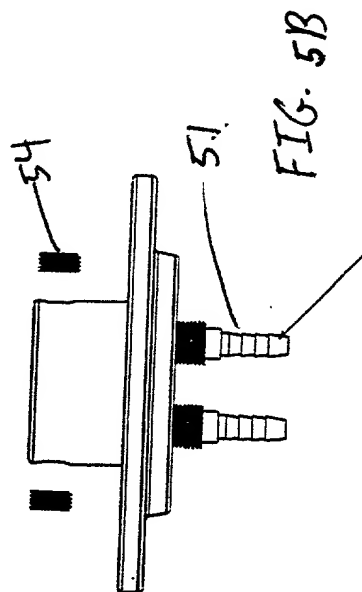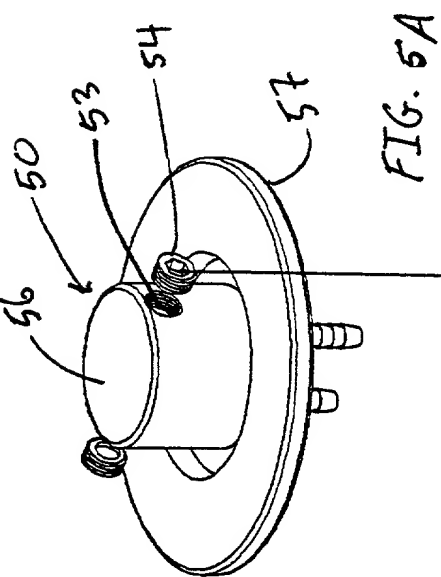

Water Cooled I-Yoke - Preferred
Jeff Jordan - 08/27/2000



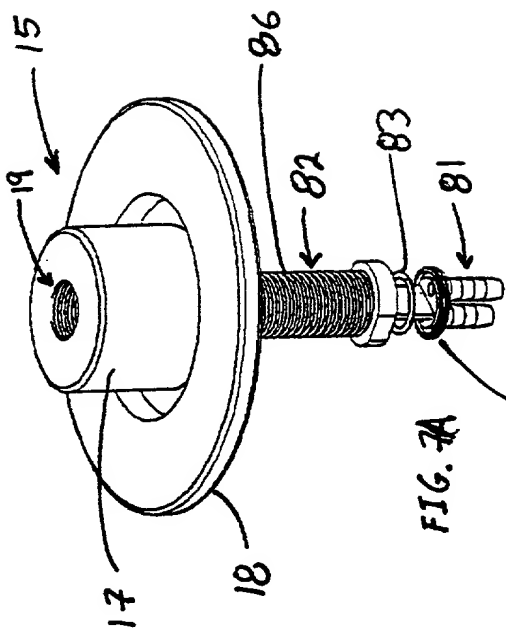


FIG. 7A

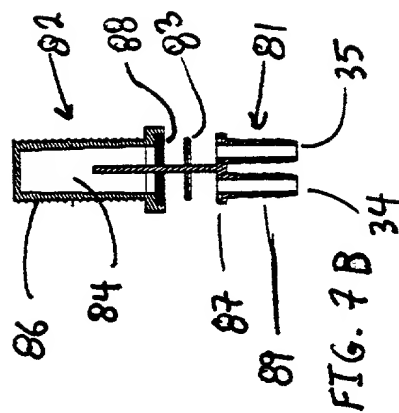
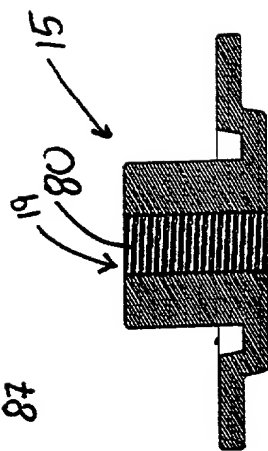


FIG. 7B

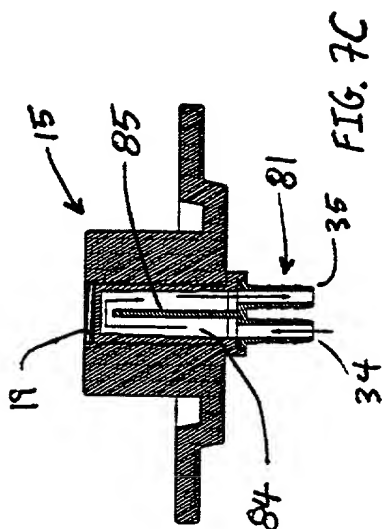


FIG. 7C

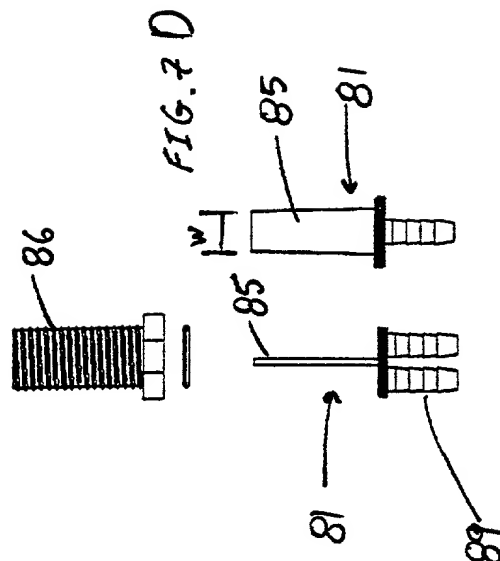


FIG 7D

000000" 67604960

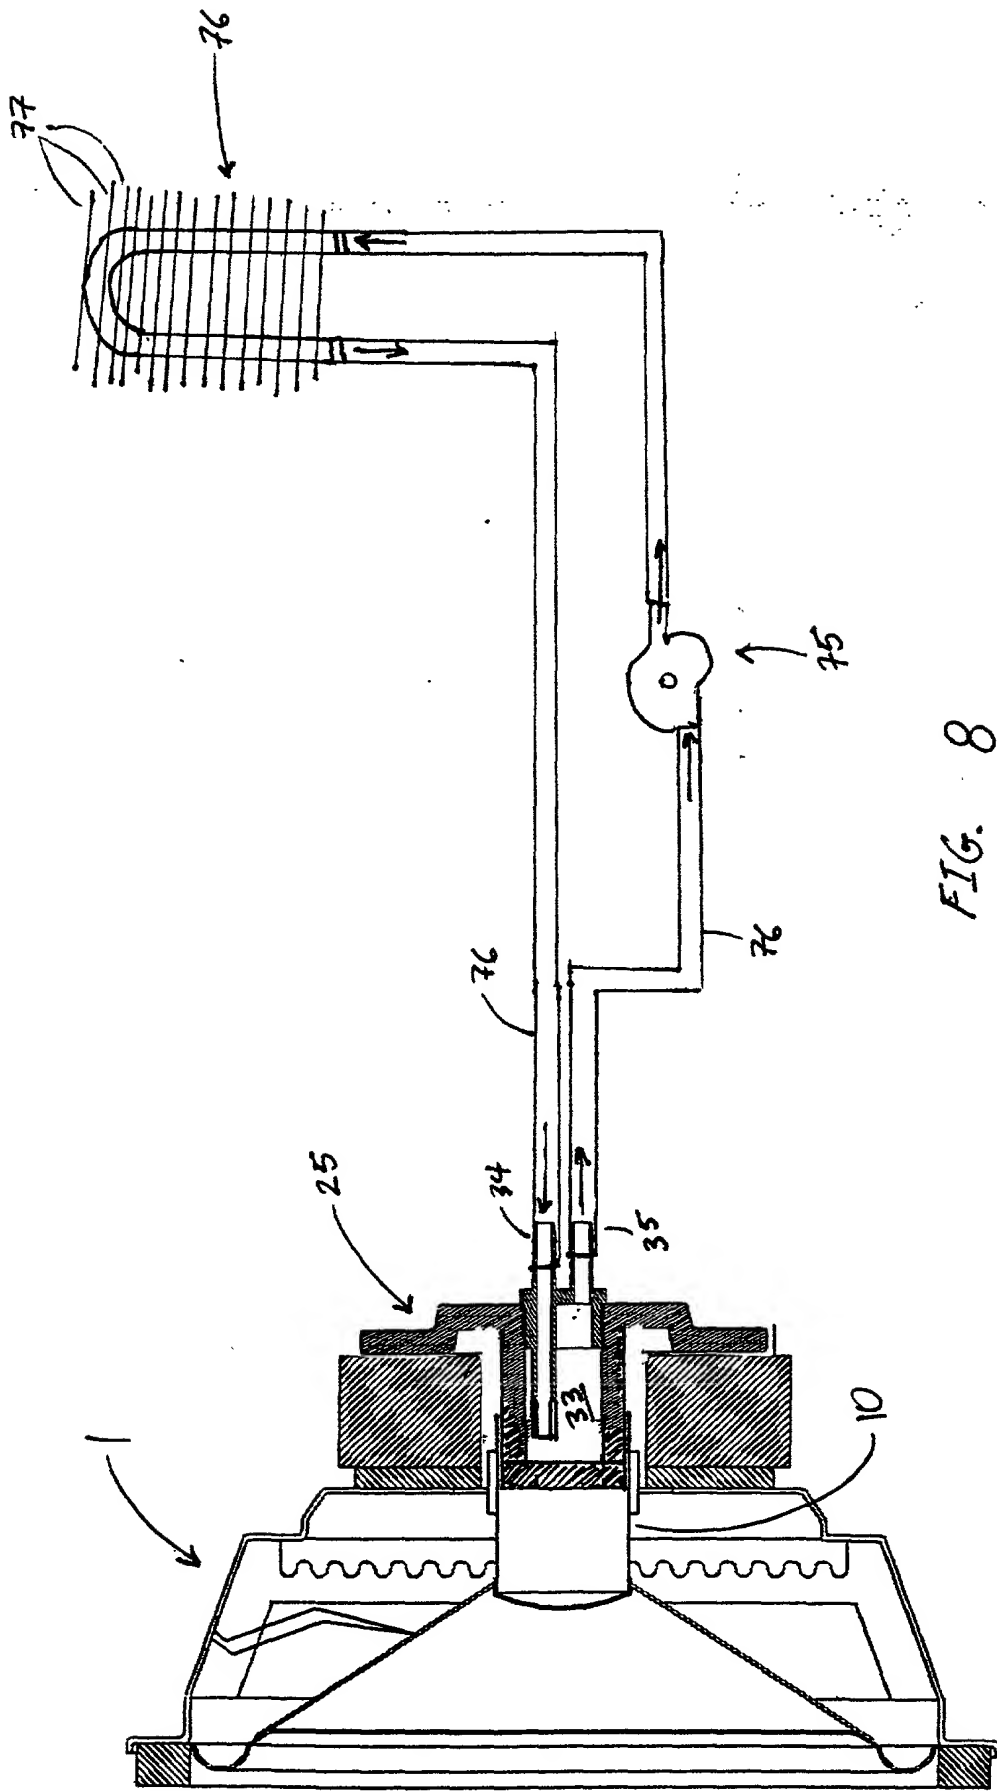


FIG. 8

IN THE UNITED STATES OF AMERICA
PATENT AND TRADEMARK OFFICE

APPLICANT: Jeff B. Jordan
TITLE: Liquid Cooled Speaker
ATTY. NO.: 7721.105

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

This declaration is for an original application.

My residence, post office address and citizenship are as stated below next to my name;

I believe I am an original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled Liquid Cooled Speaker, the specification of which is filed herewith.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

ROBERT C. TUCKER, Registration No. 31,434
WILLIAM DAVID KIESEL, Registration No. 25,883
LANCE A. FOSTER, Registration No. 38,882
BERNARD F. MERONEY, Registration No. 37,188
R. BENNETT FORD, Registration No. 39,193

SEND CORRESPONDENCE TO:

DIRECT TELEPHONE CALLS TO:

Lance A. Foster
P. O. Box 15928
Baton Rouge, Louisiana 70895

Lance A. Foster
(225) 927-9908

DECLARATION: I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE INVENTOR: Jeff B. Jordan

RESIDENCE ADDRESS: 19322 Creek Round Avenue, Baton Rouge, Louisiana 70817

POST OFFICE ADDRESS: 19322 Creek Round Avenue, Baton Rouge, Louisiana 70817

COUNTRY OF CITIZENSHIP: United States

DATE: 09/28/2000

SIGNATURE: Jeff B. Jordan

Certification Under 37 CFR 1.10

I hereby certify that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231 on this 28 day of September, 2000.

EXPRESS MAIL LABEL EL004764030US

Lisa R. Phillips